



AMPLE WONDER

Ample Wonder Limited

Add: Block C, Demei Industry Building, No. 7 Jianfeng Road,
Ronggui, Shunde, Guangdong, China

Web: www.ample-wonder.com

Email: steven@ample-wonder.com/Info@ample-wonder.com

Tel: +86-757-28363782

Mobile/Zalo/Wechat/WhatsApp: +86-136 3115 8918



AMPLE WONDER



Induction Cooker | Infrared Cooker

Product Manual



AMPLE WONDER

**DELICIOUS
PARTNER**
SO LET'S START HERE

CONTENTS

A. Induction Cooker 01-14

B. Electric Ceramic Stove 15-24

C. Combine Infrared And Induction Cooker 25-28

D. Commercial Induction Cooker 29-54



HOME
PRODUCT



INDUCTION COOKER



Single Burner Induction Cooker

Good quality
High efficiency

AMPLE WONDER



Loading QTY:
2088pcs/20'GP,4326pcs/40'GP, 5076pcs/40'HQ

AM-D103

Single burner induction cooker

220-240V, 50/60Hz, 2000W

- A-grade micro crystal glass
- High-grade metal body
- Sensor touch control,4 digital display
- Imported IGBT,stable performance
- Aluminum or copper coil for option,high thermal efficiency
- 90V-270V,large range voltage adaptability
- Overheating and Overvoltage protection
- 180 minutes timer function

Glass size:370*290MM

Gift box size:400*330*88MM

Master box size:548*425*345MM(6PCS/CTN)



AM-D104

Single burner induction cooker

220-240V, 50/60Hz, 2000W

- A-grade micro crystal glass
- New plastic body
- Sensor touch control,4 digital display
- Imported IGBT,stable performance
- Aluminum or copper coil for option,high thermal efficiency
- 90V-270V,large range voltage adaptability
- Overheating and Overvoltage protection
- 180 minutes timer function

Glass size:370*290MM

Gift box size:400*330*88MM

Master box size:548*425*345MM(6PCS/CTN)

Loading QTY:

2088pcs/20'GP,4326pcs/40'GP, 5076pcs/40'HQ



AM-D109

Single burner induction cooker

220-240V, 50/60Hz, 2000W

- A-grade micro crystal glass
- New plastic body
- Sensor touch control,4 digital display
- Imported IGBT,stable performance
- Aluminum or copper coil for option,high thermal efficiency
- 90V-270V,large range voltage adaptability
- Overheating and Overvoltage protection
- 180 minutes timer function

Glass size:370*290MM

Gift box size:400*330*88MM

Master box size:548*425*345MM(6PCS/CTN)

Loading QTY:

2088pcs/20'GP,4326pcs/40'GP, 5076pcs/40'HQ

Single Burner Induction Cooker

Good quality
High efficiency

A M P L E W O N D E R



AM-D116 Single burner induction cooker

220-240V, 50/60Hz, 2000W

A-grade micro crystal glass
New plastic body
Sensor touch control,4 digital display
Imported IGBT,stable performance
Aluminum or copper coil for option,high thermal efficiency
90V-270V,large range voltage adaptability
Overheating and Overvoltage protection
180 minutes timer function

Glass size:350*280MM

Gift box size:400*330*88MM

Master box size:548*425*345MM(6PCS/CTN)

Loading QTY:

2088pcs/20'GP,4326pcs/40'GP, 5076pcs/40'HQ

Single Burner Induction Cooker

Good quality
High efficiency

A M P L E W O N D E R



AM-D121 Single burner induction cooker

220-240V, 50/60Hz, 2000W

A-grade micro crystal glass
New plastic body
Sensor touch control,4 digital display
Imported IGBT,stable performance
Aluminum or copper coil for option,high thermal efficiency
90V-270V,large range voltage adaptability
Overheating and Overvoltage protection
180 minutes timer function

Glass size:370*290MM

Gift box size:400*330*88MM

Master box size:548*425*345MM(6PCS/CTN)

Loading QTY:

2088pcs/20'GP,4326pcs/40'GP, 5076pcs/40'HQ



AM-D117 Single burner induction cooker

220-240V, 50/60Hz, 2000W

A-grade micro crystal glass
New plastic body
Sensor touch control,4 digital display
Imported IGBT,stable performance
Aluminum or copper coil for option,high thermal efficiency
90V-270V,large range voltage adaptability
Overheating and Overvoltage protection
180 minutes timer function

Glass size:390*320MM

Gift box size:455*348*92MM

Master box size:570*470*360MM(6PCS/CTN)

Loading QTY:

1740pcs/20'GP,3606pcs/40'GP, 4230pcs/40'HQ



AM-D118 Single burner induction cooker

220-240V, 50/60Hz, 2000W

A-grade micro crystal glass
High-grade metal body
Sensor touch control,4 digital display
Imported IGBT,stable performance
Aluminum or copper coil for option,high thermal efficiency
90V-270V,large range voltage adaptability
Overheating and Overvoltage protection
180 minutes timer function

Glass size:370*290MM

Gift box size:400*330*88MM

Master box size:548*425*345MM(6PCS/CTN)

Loading QTY:

2088pcs/20'GP,4326pcs/40'GP, 5076pcs/40'HQ



AM-D120 Single burner induction cooker

220-240V, 50/60Hz, 2000W

A-grade micro crystal glass
New plastic body
Sensor touch control,4 digital display
Imported IGBT,stable performance
Aluminum or copper coil for option,high thermal efficiency
90V-270V,large range voltage adaptability
Overheating and Overvoltage protection
180 minutes timer function

Glass size:390*320MM

Gift box size:455*348*92MM

Master box size:570*470*360MM(6PCS/CTN)

Loading QTY:

1740pcs/20'GP,3606pcs/40'GP, 4230pcs/40'HQ



AM-D122 Single burner induction cooker

220-240V, 50/60Hz, 2000W

A-grade micro crystal glass
New plastic body
Sensor touch control,4 digital display
Imported IGBT,stable performance
Aluminum or copper coil for option,high thermal efficiency
90V-270V,large range voltage adaptability
Overheating and Overvoltage protection
180 minutes timer function

Glass size:370*290MM

Gift box size:400*330*88MM


Master box size:548*425*345MM(6PCS/CTN)

Loading QTY:

2088pcs/20'GP,4326pcs/40'GP, 5076pcs/40'HQ

Delicious Always In Control

Induction cooker

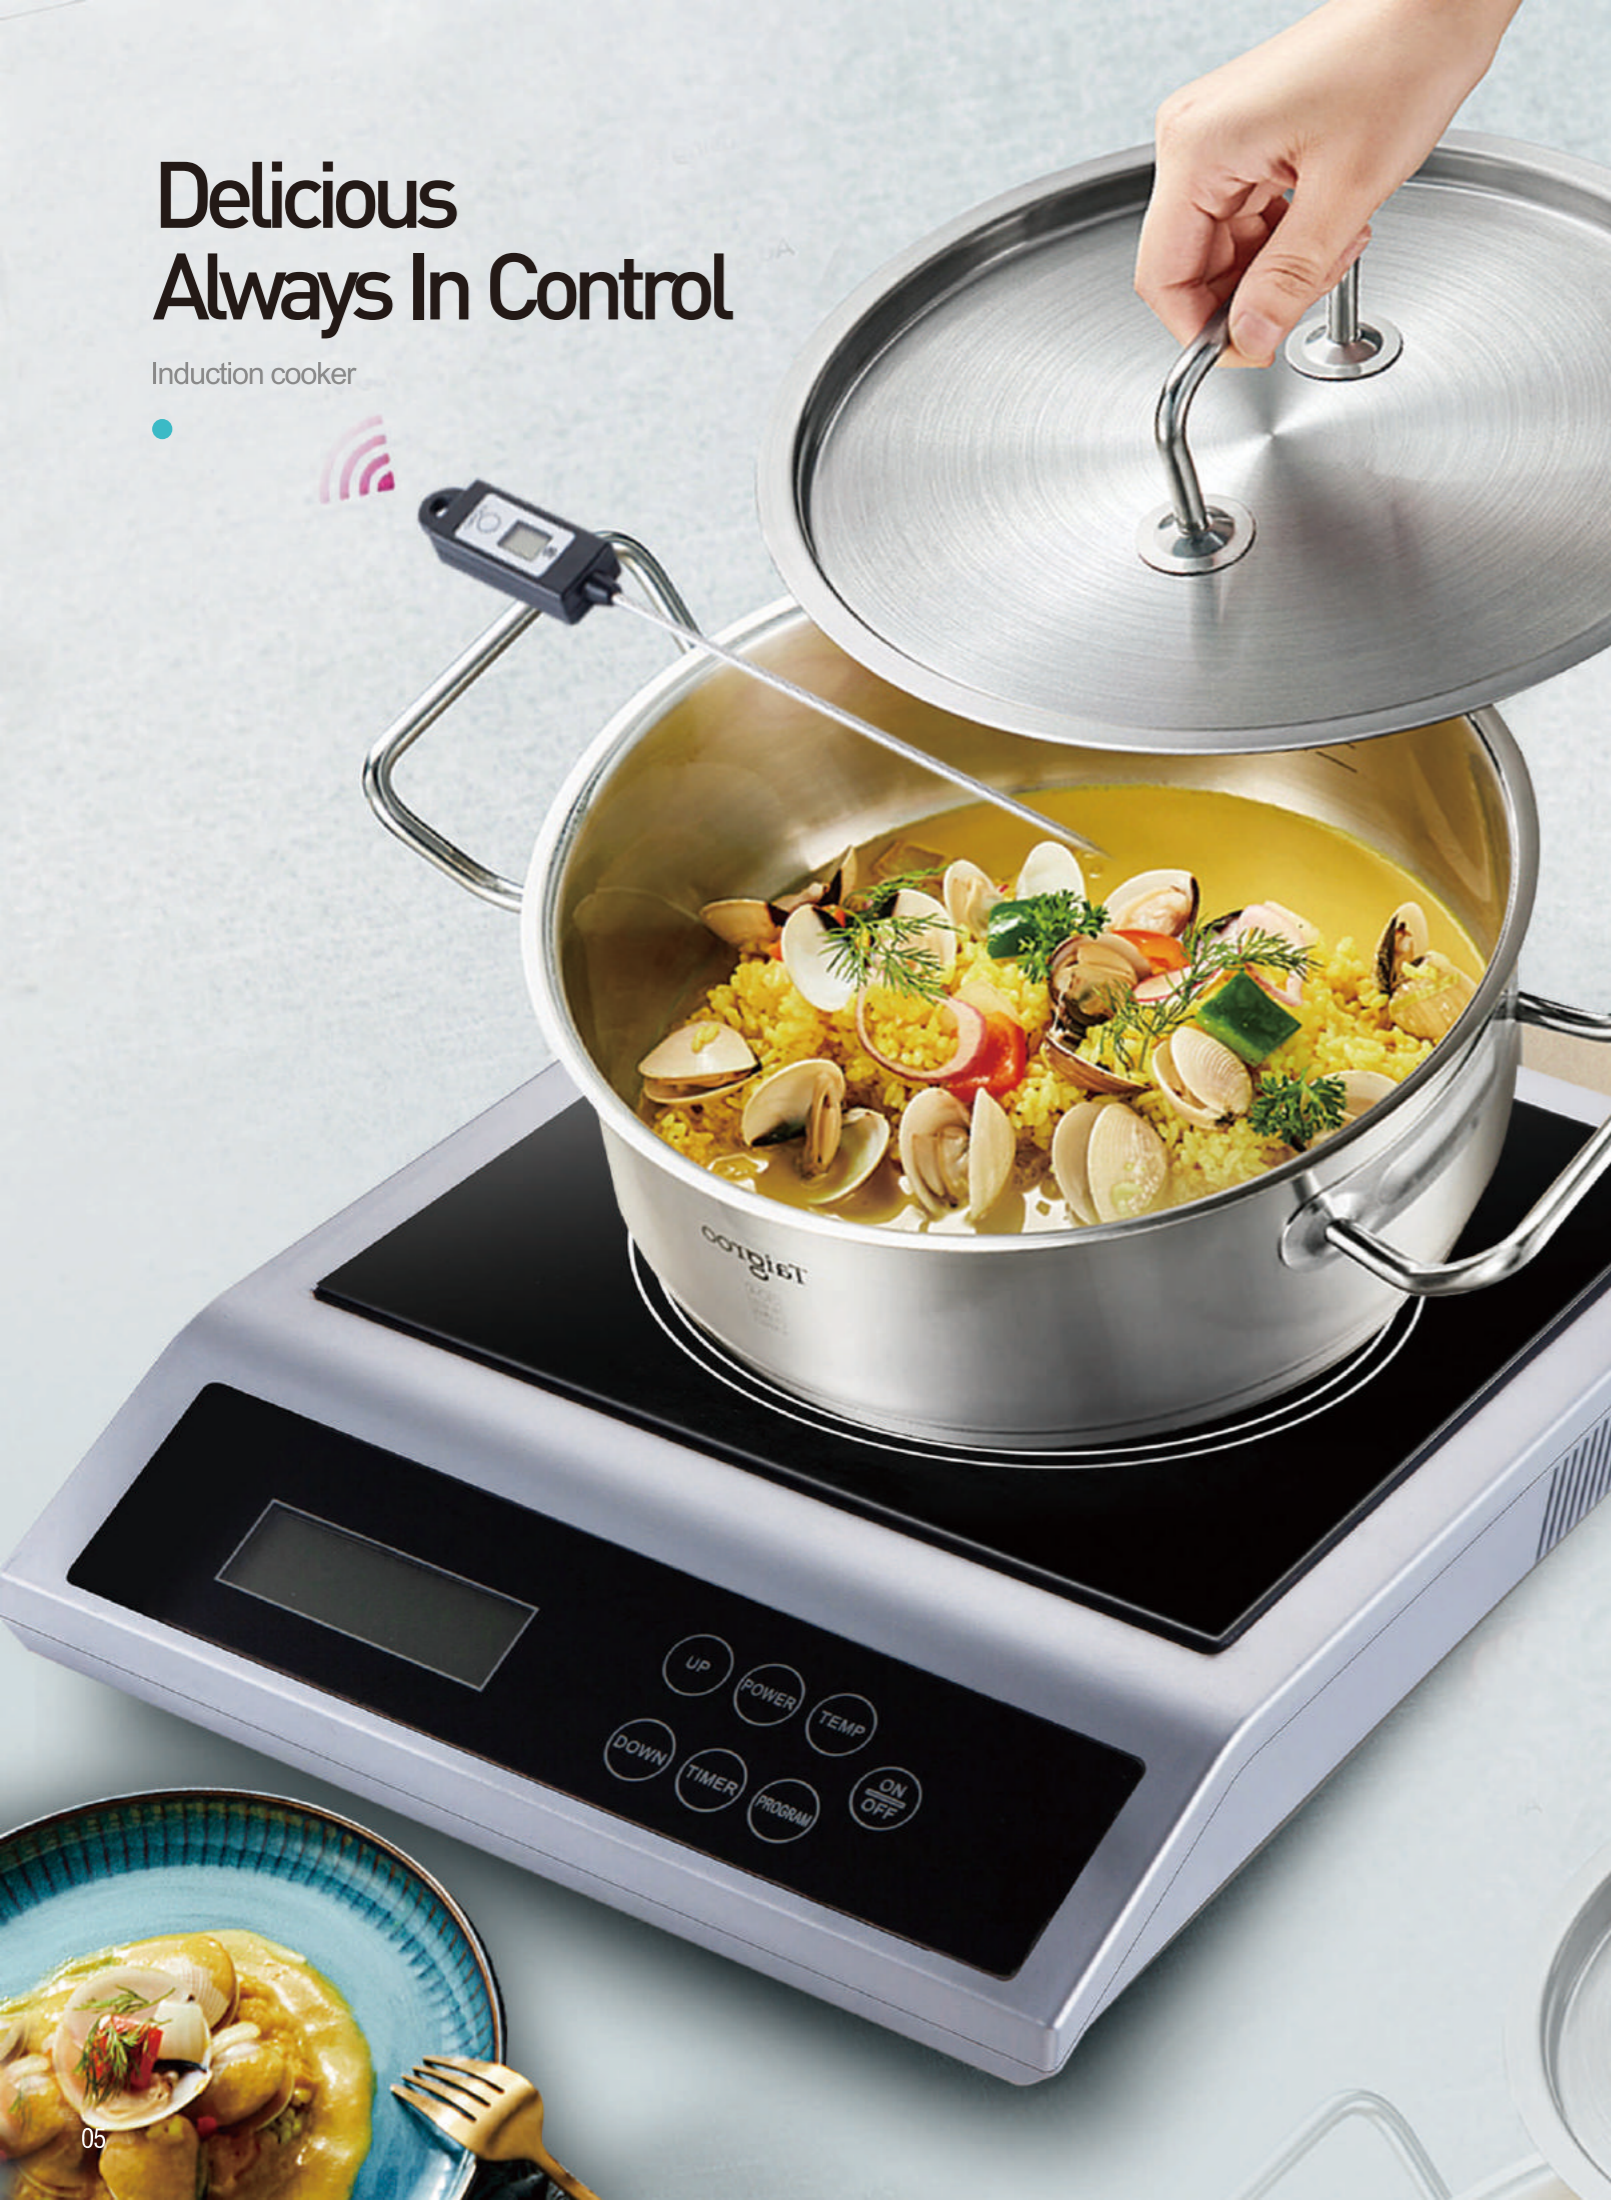

Wireless Thermo Probe

Wireless temperature measurement technology



Loading QTY:
1280pcs/20'GP, 2656pcs/40'GP, 3112pcs/40'HQ

AM-D125

Combine infrared and induction cooker

220-240V, 50/60Hz, 2500W

- A-grade micro crystal glass
- New plastic body
- Sensor touch control, 4 digital display
- Imported IGBT, stable performance
- Aluminum or copper coil for option, high thermal efficiency
- 90V-270V, large range voltage adaptability
- Overheating and Overvoltage protection
- 180 minutes timer function
- Bluetooth temperature probe

Glass size: 280*280MM

Gift box size: 485*348*122MM

Master box size: 495*490*360MM (4PCS/CTN)



MULTI-HEAD INDUCTION COOKER



Quality of life
Simple Cooking

Induction Cooker



Multi-head induction cooker




AM-D201 Double burner induction cooker

220-240V, 50/60Hz, 1800W+1300W

A-grade micro crystal glass
High-grade metal body
Sensor touch control, 4 digital display
Imported IGBT, stable performance
Aluminum or copper coil for option, high thermal efficiency
90V-270V, large range voltage adaptability
Overheating and Overvoltage protection
180 minutes timer function

Loading QTY:
876pcs/20'GP, 1816pcs/40'GP, 2130pcs/40'HQ

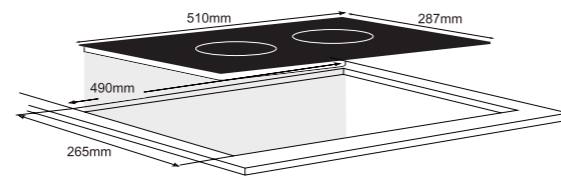

Glass size: 510*287MM
Cut-Out Size: 490*265MM
Gift box size: 545*360*140MM
Master box size: 560*380*300MM (2PCS/CTN)




AM-D209H Double burner induction cooker

220-240V, 50/60Hz, 1800W (1800W+1300W) Power share function


Half bridge technology
High-grade metal body
A-grade micro crystal glass
Sensor touch control, 4 digital display
Booster function, fast cooking, saving time
Imported IGBT, stable performance
Aluminum or copper coil for option, high thermal efficiency
90V-270V, large range voltage adaptability
Overheating and Overvoltage protection
180 minutes timer function

Glass size: 520*360MM
Cut-Out Size: 480*320MM
Gift box size: 565*415*135MM
Master box size: 585*560*425MM (4PCS/CTN)

Loading QTY:
804pcs/20'GP, 1664pcs/40'GP, 1952pcs/40'HQ

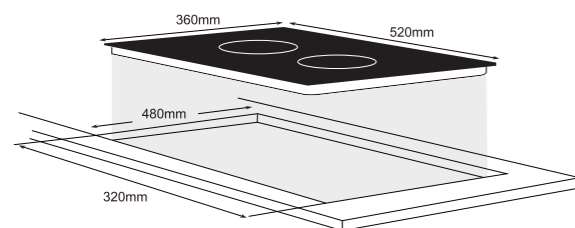

The above marks are for reference only

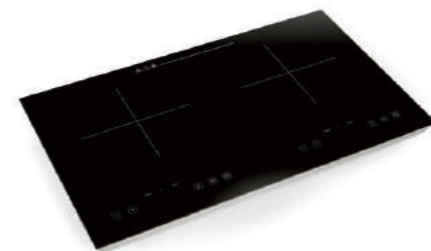


AM-D202 Double burner induction cooker

220-240V, 50/60Hz, 2000W+2000W

A-grade micro crystal glass
High-grade metal body
Sensor touch control, 4 digital display
Imported IGBT, stable performance
Aluminum or copper coil for option, high thermal efficiency
90V-270V, large range voltage adaptability
Overheating and Overvoltage protection
180 minutes timer function

Glass size: 730*420MM
Cut-Out Size: 680*380MM
Gift box size: 777*457*120MM
Master box size: 785*468*265MM (2PCS/CTN)

Loading QTY:
574pcs/20'GP, 1190pcs/40'GP, 1396pcs/40'HQ

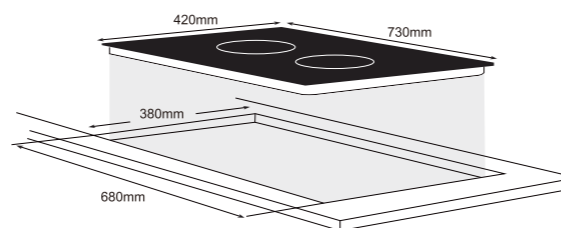

The above marks are for reference only

Multi-head induction cooker




AM-D203 Double burner induction cooker

220-240V, 50/60Hz, 2000W+2000W Booster: 2200W+2200W

A-grade micro crystal glass
High-grade metal body
Sensor touch control, 4 digital display
Booster function, fast cooking, saving time
Imported IGBT, stable performance
Aluminum or copper coil for option, high thermal efficiency
90V-270V, large range voltage adaptability
Overheating and Overvoltage protection
180 minutes timer function

Loading QTY:
574pcs/20'GP, 1190pcs/40'GP, 1396pcs/40'HQ

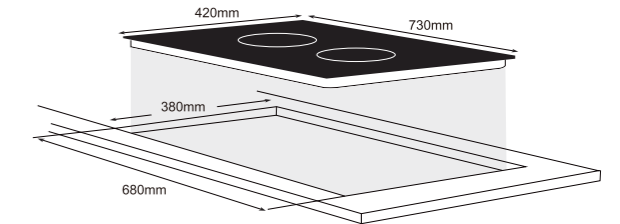

The above marks are for reference only

Glass size: 730*420MM
Cut-Out Size: 680*380MM
Gift box size: 777*457*120MM
Master box size: 785*468*265MM (2PCS/CTN)




AM-D205 Double burner induction cooker

220-240V, 50/60Hz, 2000W+2000W Booster: 2200W+2200W

A-grade micro crystal glass
High-grade metal body
Sensor touch control, 4 digital display
Booster function, fast cooking, saving time
Imported IGBT, stable performance
Aluminum or copper coil for option, high thermal efficiency
90V-270V, large range voltage adaptability
Overheating and Overvoltage protection
180 minutes timer function

Glass size: 730*420MM
Cut-Out Size: 680*380MM
Gift box size: 777*457*120MM
Master box size: 785*468*265MM (2PCS/CTN)

Loading QTY:
574pcs/20'GP, 1190pcs/40'GP, 1396pcs/40'HQ

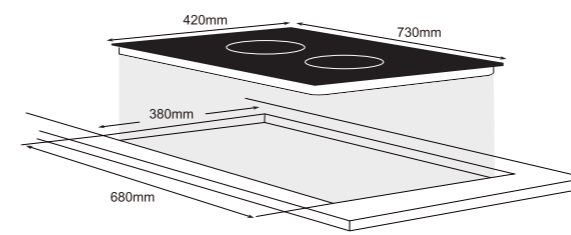

The above marks are for reference only




AM-D211 Double burner induction cooker

220-240V, 50/60Hz, 2200W+2200W Booster: 2400W+2400W

A-grade micro crystal glass
High-grade metal body
Sensor touch control, 4 digital display
Booster function, fast cooking, saving time
Imported IGBT, stable performance
Aluminum or copper coil for option, high thermal efficiency
90V-270V, large range voltage adaptability
Overheating and Overvoltage protection
180 minutes timer function

Glass size: 730*420MM
Cut-Out Size: 680*380MM
Gift box size: 777*457*120MM
Master box size: 785*468*265MM (2PCS/CTN)

Loading QTY:
574pcs/20'GP, 1190pcs/40'GP, 1396pcs/40'HQ

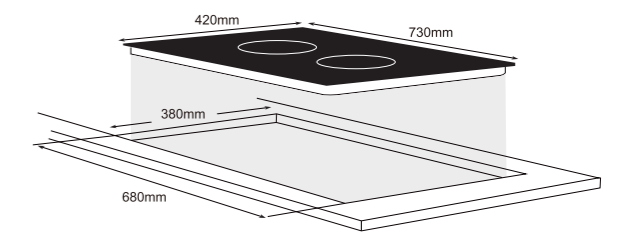

The above marks are for reference only

Multi-head induction cooker




AM-D212 Double burner induction cooker

220-240V, 50/60Hz, 2200W+2200W Booster:2400W+2400W

A-grade micro crystal glass
High-grade metal body
Sensor touch control,4 digital display
Booster function,fast cooking,saving time
Imported IGBT,stable performance
Aluminum or copper coil for option,high thermal efficiency
90V-270V,large range voltage adaptability
Overheating and Overvoltage protection
180 minutes timer function

Loading QTY:

574pcs/20'GP,1190pcs/40'GP, 1396pcs/40'HQ

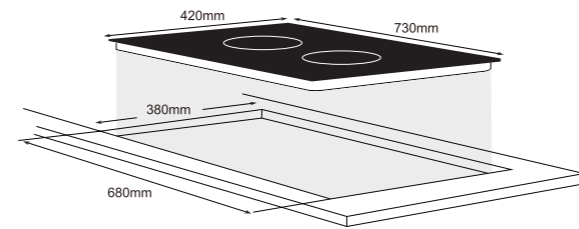

ⓂThe above marks are for reference only

Glass size:730*420MM
Cut-Out Size:680*380MM
Gift box size:777*457*120MM
Master box size:785*468*265MM(2PCS/CTN)



AM-D213 Double burner induction cooker


220-240V, 50/60Hz, 2200W+2200W Booster:2400W+2400W

A-grade micro crystal glass
High-grade metal body
Sensor touch control,4 digital display
Booster function,fast cooking,saving time
Imported IGBT,stable performance
Aluminum or copper coil for option,high thermal efficiency
90V-270V,large range voltage adaptability
Overheating and Overvoltage protection
180 minutes timer function

Glass size:730*420MM
Cut-Out Size: 680*380MM
Gift box size:777*457*120MM
Master box size:785*468*265MM(2PCS/CTN)

Loading QTY:

574pcs/20'GP,1190pcs/40'GP, 1396pcs/40'HQ

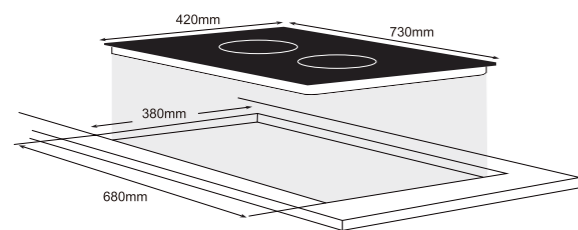

ⓂThe above marks are for reference only

Multi-head induction cooker




AM-D216H Double burner induction cooker

220-240V, 50/60Hz, 2200W+2200W Booster:2400W+2400W

Half bridge technology
High-grade metal body
A-grade micro crystal glass
Sensor touch control,4 digital display
Booster function,fast cooking,saving time
Imported IGBT,stable performance
Aluminum or copper coil for option,high thermal efficiency
90V-270V,large range voltage adaptability
Overheating and Overvoltage protection
180 minutes timer function

Loading QTY:

574pcs/20'GP,1190pcs/40'GP, 1396pcs/40'HQ

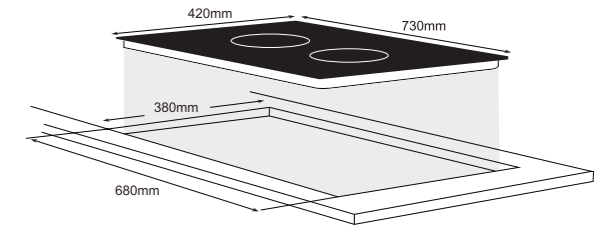

ⓂThe above marks are for reference only

Glass size:730*420MM
Cut-Out Size: 680*380MM
Gift box size:777*457*120MM
Master box size:785*468*265MM(2PCS/CTN)



AM-D218H Double burner induction cooker


2400W(1500W+1500W) Power share function Booster:2400W+2400W

Half bridge technology
High-grade metal body
A-grade micro crystal glass
Sensor touch control,4 digital display
Booster function,fast cooking,saving time
Imported IGBT,stable performance
Aluminum or copper coil for option,high thermal efficiency
90V-270V,large range voltage adaptability
Overheating and Overvoltage protection
180 minutes timer function

Glass size:730*420MM
Cut-Out Size:680*380MM
Gift box size:777*457*120MM
Master box size:785*468*265MM(2PCS/CTN)

Loading QTY:

574pcs/20'GP,1190pcs/40'GP, 1396pcs/40'HQ

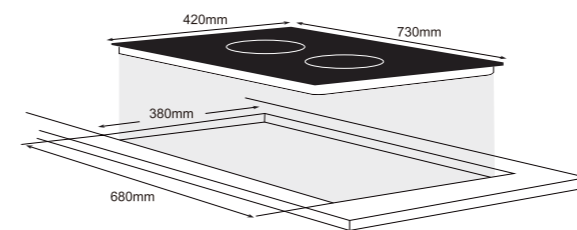

ⓂThe above marks are for reference only



AM-D221 Double burner induction cooker


220-240V, 50/60Hz, 2500W+2500W Booster:2800W+2800W

Half bridge technology
High-grade metal body
A-grade micro crystal glass
Sensor touch control,4 digital display
Booster function,fast cooking,saving time
Imported IGBT,stable performance
Aluminum or copper coil for option,high thermal efficiency
90V-270V,large range voltage adaptability
Overheating and Overvoltage protection
180 minutes timer function

Glass size:750*450MM
Cut-Out Size:680*380MM
Gift box size:825*508*125MM
Master box size:830*515*260MM(2PCS/CTN)

Loading QTY:

574pcs/20'GP,1120pcs/40'GP, 1360pcs/40'HQ

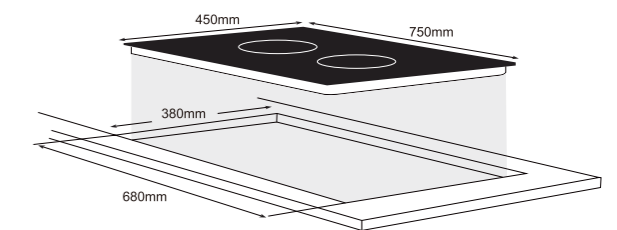


ⓂThe above marks are for reference only

Multi-head induction cooker



AM-D302 Three burner induction cooker
 220-240V, 50/60Hz, 1200W+1800W+2200W
 A-grade micro crystal glass
 High-grade metal body
 Sensor touch control, 4 digital display
 Imported IGBT, stable performance
 Aluminum or copper coil for option, high thermal efficiency
 90V-270V, large range voltage adaptability
 Overheating and Overvoltage protection
 180 minutes timer function
 Glass size: 580*500MM
 Cut-Out Size: 550*470MM
 Gift box size: 640*575*135MM
 Master box size: 660*595*290MM(2PCS/CTN)

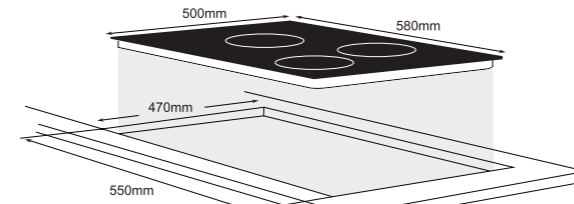


The above marks are for reference only

Loading QTY:
 490pcs/20'GP, 1018pcs/40'GP, 1194pcs/40'HQ



AM-D305 Three burner induction cooker
 220-240V, 50/60Hz, 2500W+1200W+2200W
 A-grade micro crystal glass
 High-grade metal body
 Imported IGBT, stable performance
 Aluminum or copper coil for option, high thermal efficiency
 90V-270V, large range voltage adaptability
 Overheating and Overvoltage protection
 180 minutes timer function
 Glass size: 860*450MM
 Cut-Out Size: 830*420MM
 Master box size: 920*510*150MM(2PCS/CTN)

Loading QTY:
 794pcs/20'GP, 1648pcs/40'GP, 1932pcs/40'HQ

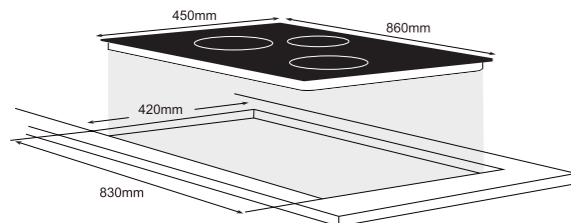


The above marks are for reference only



AM-D306 Three burner induction cooker
 220-240V, 50/60Hz, 1200W+1800W+2200W
 A-grade micro crystal glass
 High-grade metal body
 Sensor touch control, 4 digital display
 Imported IGBT, stable performance
 Aluminum or copper coil for option, high thermal efficiency
 90V-270V, large range voltage adaptability
 Overheating and Overvoltage protection
 180 minutes timer function
 Glass size: 580*500MM
 Cut-Out Size: 550*470MM
 Gift box size: 640*575*135MM
 Master box size: 660*595*290MM(2PCS/CTN)

Loading QTY:
 490pcs/20'GP, 1018pcs/40'GP, 1194pcs/40'HQ

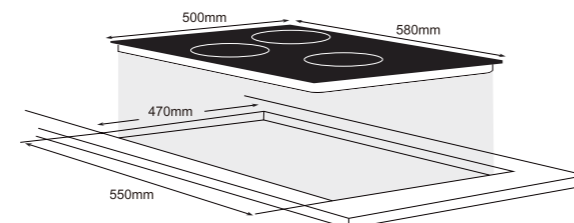

The above marks are for reference only

Multi-head induction cooker




Loading QTY:
 490pcs/20'GP, 1018pcs/40'GP, 1194pcs/40'HQ




AM-D401 Four burner induction cooker
 220-240V, 50/60Hz, 2000W+1500W+2000W+1500W
 A-grade micro crystal glass
 High-grade metal body
 Sensor touch control, 4 digital display
 Imported IGBT, stable performance
 Aluminum or copper coil for option, high thermal efficiency
 90V-270V, large range voltage adaptability
 Overheating and Overvoltage protection
 180 minutes timer function
 Glass size: 590*520MM
 Cut-Out Size: 565*500MM
 Gift box size: 640*560*139MM
 Master box size: 660*570*295MM(2PCS/CTN)

Loading QTY:
 504pcs/20'GP, 1044pcs/40'GP, 1224pcs/40'HQ

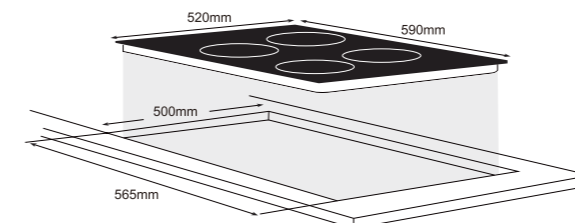

The above marks are for reference only

AM-D308 Three burner induction cooker
 220-240V, 50/60Hz, 1200W+1800W+2200W
 A-grade micro crystal glass
 High-grade metal body
 Sensor touch control, 4 digital display
 Imported IGBT, stable performance
 Aluminum or copper coil for option, high thermal efficiency
 90V-270V, large range voltage adaptability
 Overheating and Overvoltage protection
 180 minutes timer function
 Glass size: 580*500MM
 Cut-Out Size: 550*470MM
 Gift box size: 640*575*135MM
 Master box size: 660*595*290MM(2PCS/CTN)

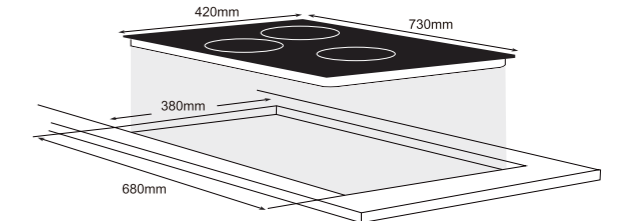


The above marks are for reference only



AM-D402 Four burner induction cooker
 220-240V, 50/60Hz, 2000W+1400W+2000W+1400W
 A-grade micro crystal glass
 High-grade metal body
 Sensor touch control, 4 digital display
 Imported IGBT, stable performance
 Aluminum or copper coil for option, high thermal efficiency
 90V-270V, large range voltage adaptability
 Overheating and Overvoltage protection
 180 minutes timer function
 Glass size: 590*520MM
 Cut-Out Size: 565*500MM
 Gift box size: 640*560*139MM
 Master box size: 660*570*295MM(2PCS/CTN)

Loading QTY:
 504pcs/20'GP, 1044pcs/40'GP, 1224pcs/40'HQ

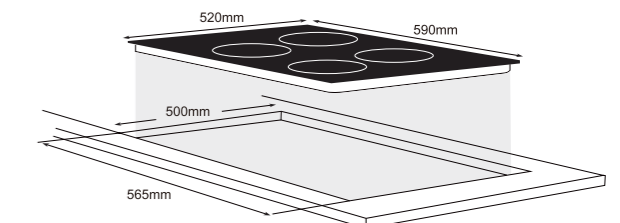

The above marks are for reference only



ELECTRIC CERAMIC STOVE



Single burner infrared cooker

Good quality
High efficiency

AMPLE WONDER



AM-F101 Single burner infrared cooker

220-240V, 50/60Hz, 2200W

Special black crystal glass for infrared cooker
High-grade metal body
Sensor touch control, 4 digital display
Over heating and Over voltage protection
180 minutes timer function

Loading QTY:
1748pcs/20'GP, 3620pcs/40'GP, 4244pcs/40'HQ

Glass size: 360*280MM
Gift box size: 455*330*95MM
Master box size: 470*395*345(4PCS/CTN)



AM-F102 Single burner infrared cooker

220-240V, 50/60Hz, 2300W

Special black crystal glass for infrared cooker
High-grade metal body
Sensor touch control, 4 digital display
Over heating and Over voltage protection
180 minutes timer function

Glass size: 390*310MM
Gift box size: 440*370*125MM
Master box size: 550*480*400(4PCS/CTN)

Loading QTY:
1060pcs/20'GP, 2196pcs/40'GP, 2572pcs/40'HQ



AM-F103 Single burner infrared cooker

220-240V, 50/60Hz, 2000W

Special black crystal glass for infrared cooker
New plastic body
Sensor touch control, 4 digital display
Over heating and Over voltage protection
180 minutes timer function

Glass size: 360*280MM
Gift box size: 405*330*88MM
Master box size: 548*423*343(4PCS/CTN)

Loading QTY:
1408pcs/20'GP, 2916pcs/40'GP, 3420pcs/40'HQ

Single burner infrared cooker

Good quality
High efficiency

AMPLE WONDER



AM-F105 Single burner infrared cooker

220-240V, 50/60Hz, 2200W

Special black crystal glass for infrared cooker
High-grade metal body
Sensor touch control, 4 digital display
Over heating and Over voltage protection
180 minutes timer function

Glass size: 360*280MM

Gift box size: 455*330*95MM

Master box size: 470*395*345(4PCS/CTN)

Loading QTY:

1748pcs/20'GP, 3620pcs/40'GP, 4244pcs/40'HQ



SINGLE BURNER

Infrared cooker



AM-F106 Single burner infrared cooker

220-240V, 50/60Hz, 2000W

Special black crystal glass for infrared cooker
New plastic body
Sensor touch control, 4 digital display
Over heating and Over voltage protection
180 minutes timer function

Glass size: 360*280MM

Gift box size: 405*330*88MM

Master box size: 548*423*343(4PCS/CTN)

Loading QTY:

1408pcs/20'GP, 2916pcs/40'GP, 3420pcs/40'HQ



Infrared vertical heat transfer
Constant temperature
Not easy to paste bottom

Large firepower
Uniform heat conduction



Suitable for all flat bottom pots and pans (diameter 12cm to 36cm)




Touch Control



2000W



Vertical heat conduction

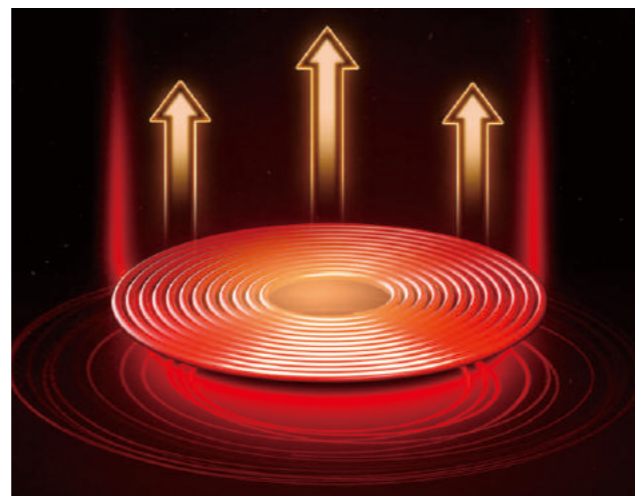

AM-F109 Single burner infrared cooker

220-240V, 50/60Hz, 2000W

Special black crystal glass for infrared cooker
New plastic body
Sensor touch control, 4 digital display
Over heating and Over voltage protection
180 minutes timer function

Glass size: 360*280MM

Gift box size: 405*330*88MM

Master box size: 548*423*343(4PCS/CTN)

Loading QTY:

1408pcs/20'GP, 2916pcs/40'GP, 3420pcs/40'HQ

AM-F120 Single burner infrared cooker

220-240V, 50/60Hz, 2000W

Special black crystal glass for infrared cooker
New plastic body
Sensor touch control, 4 digital display
Over heating and Over voltage protection
180 minutes timer function

Glass size: 390*320MM

Gift box size: 455*348*92MM

Master box size: 570*470*360(6PCS/CTN)

Loading QTY:

740pcs/20'GP, 3606pcs/40'GP, 4230pcs/40'HQ



Good quality
High efficiency

A M P L E W O N D E R

Double burner infrared cooker



AM-F205

Double burner infrared cooker

220-240V, 50/60Hz, 2200W(L)+2300W (R)

Special black crystal glass for infrared cooker
High-grade metal body
Sensor touch control,4 digital display
Over heating and Over voltage protection
180 minutes timer function

Glass size:730*420MM
Cut-Out Size:710*400MM
Gift box size:825*520*140MM
Master box size:845*545*310MM(2PCS/CTN)

Loading QTY:
388pcs/20'GP,806pcs/40'GP, 946pcs/40'HQ



Refer to AM-F205 for product size drawing



AM-F201


Double burner infrared cooker

220-240V, 50/60Hz, 1800W(L)+2200W (R)

Special black crystal glass for infrared cooker
High-grade metal body
Sensor touch control,4 digital display
Over heating and Over voltage protection
180 minutes timer function

Glass size:690*420MM
Cut-Out Size:670*400MM
Gift box size:825*520*140MM
Master box size:845*545*305MM(2PCS/CTN)

Loading QTY:
388pcs/20'GP,806pcs/40'GP, 946pcs/40'HQ

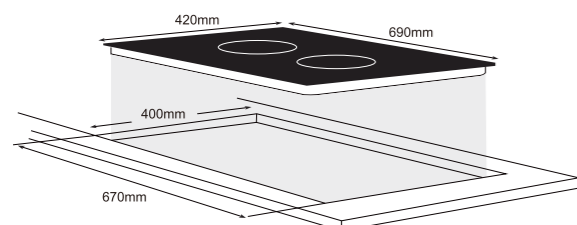

The above marks are for reference only



AM-F202


Double burner infrared cooker

220-240V, 50/60Hz, 1800W+1300W

Special black crystal glass for infrared cooker
High-grade metal body
Sensor touch control,4 digital display
Over heating and Over voltage protection
180 minutes timer function

Glass size:510*287MM
Cut-Out Size:490*265MM
Gift box size:545*360*140MM
Master box size:560*380*300MM(2PCS/CTN)

Loading QTY:
876pcs/20'GP,1816pcs/40'GP, 2130pcs/40'HQ

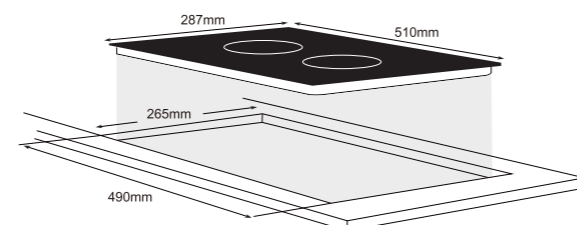

The above marks are for reference only



AM-F203


Double burner infrared cooker

220-240V, 50/60Hz, 1800W(L)+2200W (R)

Special black crystal glass for infrared cooker
High-grade metal body
Sensor touch control,4 digital display
Over heating and Over voltage protection
180 minutes timer function

Glass size:690*420MM
Cut-Out Size: 670*400MM
Gift box size:825*520*140MM
Master box size:845*545*305MM(2PCS/CTN)

Loading QTY:
388pcs/20'GP,806pcs/40'GP, 946pcs/40'HQ

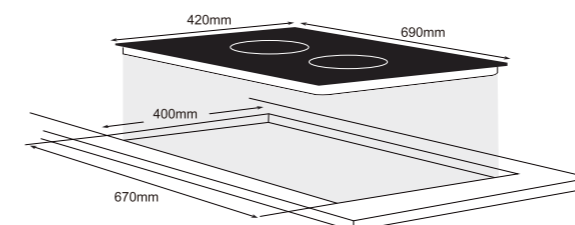

The above marks are for reference only



AM-F206


Double burner infrared cooker

220-240V, 50/60Hz, 2300W(L)+2300W (R)

Special black crystal glass for infrared cooker
High-grade metal body
Sensor touch control,4 digital display
Over heating and Over voltage protection
180 minutes timer function

Glass size:730*440MM
Cut-Out Size: 710*400MM
Gift box size:825*520*140MM
Master box size:850*545*310MM(2PCS/CTN)

Loading QTY:
388pcs/20'GP,806pcs/40'GP, 946pcs/40'HQ

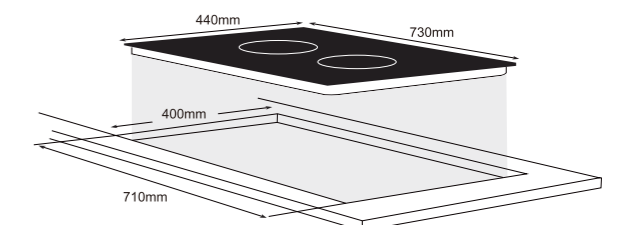

The above marks are for reference only

BOTH STOVES CAN WORK
AT THE SAME TIME

4600W
LARGE FIREPOWER

2300W

2300W



Double burner infrared cooker



Refer to AM-F210 for product size drawing



AM-F208

Double burner infrared cooker

220-240V, 50/60Hz, 2300W(L)+2300W (R)

Special black crystal glass for infrared cooker
High-grade metal body
Sensor touch control, 4 digital display
Over heating and Over voltage protection
180 minutes timer function

Glass size: 690*420MM
Cut-Out Size: 670*400MM
Gift box size: 755*485*140MM
Master box size: 770*505*310MM (2PCS/CTN)

Loading QTY:
464pcs/20'GP, 962pcs/40'GP, 1128pcs/40'HQ



AM-F210


Double burner infrared cooker

220-240V, 50/60Hz, 1600W(L)+1800W (R)

Special black crystal glass for infrared cooker
High-grade metal body
Sensor touch control, 4 digital display
Over heating and Over voltage protection
180 minutes timer function

Glass size: 690*420MM
Cut-Out Size: 670*400MM
Gift box size: 755*485*140MM
Master box size: 770*505*310MM (2PCS/CTN)

Loading QTY:
464pcs/20'GP, 962pcs/40'GP, 1128pcs/40'HQ

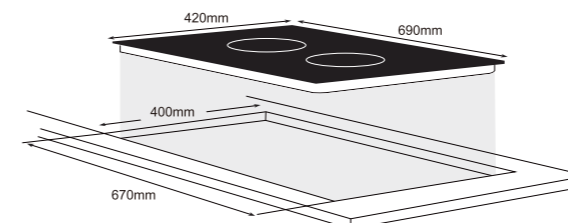

※The above marks are for reference only

AM-F216


Double burner infrared cooker

220-240V, 50/60Hz, 1500W(L)+2000W (R)

Special black crystal glass for infrared cooker
High-grade metal body
Sensor touch control, 4 digital display
Over heating and Over voltage protection
180 minutes timer function

Glass size: 600*360MM
Cut-Out Size: 580*320MM
Gift box size: 630*390*115MM
Master box size: 638*398*245MM (2PCS/CTN)

Loading QTY:
900pcs/20'GP, 1864pcs/40'GP, 2186pcs/40'HQ

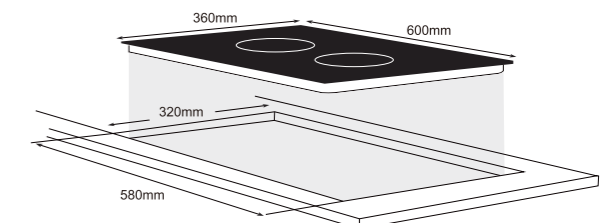

※The above marks are for reference only



ELECTRIC CERAMIC STOVE

Infrared cooker



Precise temperature control



2000W



Infrared vertical energy accumulation



AMPLE WONDER




AM-F401 Four burner infrared cooker

220-240V, 50/60Hz, 1600W+1800W+1800W+1600W

Special black crystal glass for infrared cooker
High-grade metal body
Sensor touch control, 4 digital display
Over heating and Over voltage protection
180 minutes timer function

Glass size: 590*520MM
Cut-Out Size: 570*480MM
Gift box size: 640*560*139MM
Master box size: 660*570*295MM(2PCS/CTN)

Loading QTY:
504pcs/20'GP, 1044pcs/40'GP, 1224pcs/40'HQ

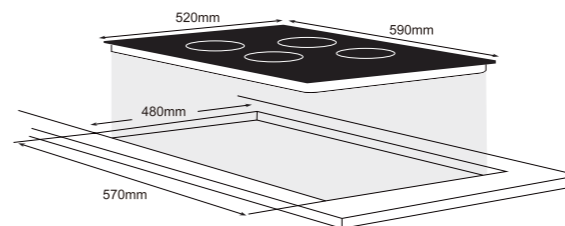

ⓂThe above marks are for reference only


AM-F402 Four burner infrared cooker

220-240V, 50/60Hz, 1600W+1800W+1800W+1600W

Special black crystal glass for infrared cooker
High-grade metal body
Sensor touch control, 4 digital display
Over heating and Over voltage protection
180 minutes timer function

Glass size: 590*520MM
Cut-Out Size: 570*480MM
Gift box size: 640*560*139MM
Master box size: 660*570*295MM(2PCS/CTN)

Loading QTY:
504pcs/20'GP, 1044pcs/40'GP, 1224pcs/40'HQ

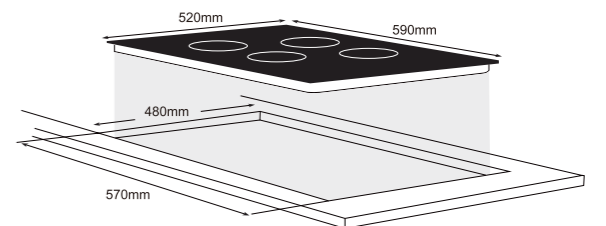

ⓂThe above marks are for reference only



COMBINE INFRARED AND INDUCTION COOKER



Combine infrared and induction cooker




Glass size:690*420MM
Cut-Out Size: 670*400MM
Gift box size:755*485*140MM
Master box size:770*505*310MM(2PCS/CTN)

AM-DF201 Combine infrared and induction cooker

220-240V, 50/60Hz, 2000W(L)+2000W(R)

Special black crystal glass for infrared cooker
High-grade metal body
Sensor touch control,4 digital display
Half bridge technology
Imported IGBT,stable performance
Aluminum or copper coil for option,high thermal efficiency
90V-270V,large range voltage adaptability
Overheating and Overvoltage protection
180 minutes timer function

Loading QTY:
464pcs/20'GP,962pcs/40'GP, 1128pcs/40'HQ

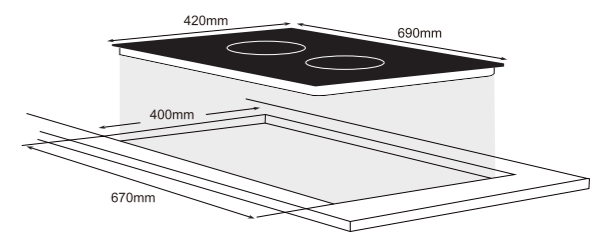


AM-DF202 Combine infrared and induction cooker

220-240V, 50/60Hz, 2000W(L)+2000W(R)

Special black crystal glass for infrared cooker
High-grade metal body
Sensor touch control,4 digital display
Half bridge technology
Imported IGBT,stable performance
Aluminum or copper coil for option,high thermal efficiency
90V-270V,large range voltage adaptability
Overheating and Overvoltage protection
180 minutes timer function

Glass size:690*420MM
Cut-Out Size: 670*400MM
Gift box size:755*485*140MM
Master box size:770*505*310MM(2PCS/CTN)

Loading QTY:
464pcs/20'GP,962pcs/40'GP, 1128pcs/40'HQ

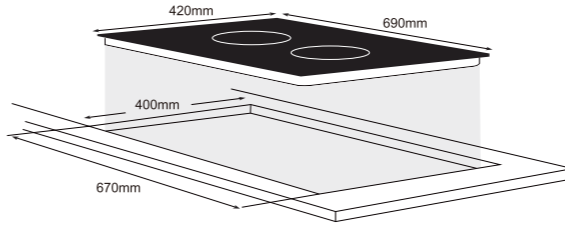


AM-DF205 Combine infrared and induction cooker

220-240V, 50/60Hz, 2200W(L)+1300W(R)

Special black crystal glass for infrared cooker
High-grade metal body
Sensor touch control,4 digital display
Half bridge technology
Imported IGBT,stable performance
Aluminum or copper coil for option,high thermal efficiency
90V-270V,large range voltage adaptability
Overheating and Overvoltage protection
180 minutes timer function

Glass size:690*420MM
Cut-Out Size:670*400MM
Gift box size:825*520*140MM
Master box size:845*545*305MM(2PCS/CTN)

Loading QTY:
398pcs/20'GP,824pcs/40'GP, 968pcs/40'HQ

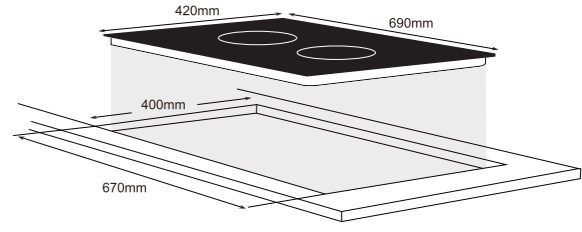

Combine infrared and induction cooker




Glass size:730*430MM
 Cut-Out Size: 710*410MM
 Gift box size:770*500*135MM
 Master box size:790*540*295MM(2PCS/CTN)

AM-DF208H Combine infrared and induction cooker

220-240V, 50/60Hz, 2300W(L)+2500W (R)

Special black crystal glass for infrared cooker
 High-grade metal body
 Sensor touch control,4 digital display
 Half bridge technology
 Imported IGBT,stable performance
 Aluminum or copper coil for option,high thermal efficiency
 90V-270V,large range voltage adaptability
 Overheating and Overvoltage protection
 180 minutes timer function

Loading QTY:
 444pcs/20'GP,920pcs/40'GP, 1080pcs/40'HQ

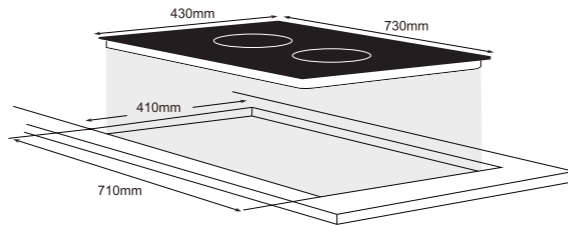


AM-DF210 Combine infrared and induction cooker

220-240V, 50/60Hz, 3000W(2000W+2000W) Power share function

Special black crystal glass for infrared cooker
 High-grade metal body
 Sensor touch control,4 digital display
 Half bridge technology
 Imported IGBT,stable performance
 Aluminum or copper coil for option,high thermal efficiency
 90V-270V,large range voltage adaptability
 Overheating and Overvoltage protection
 180 minutes timer function

Glass size:690*420MM
 Cut-Out Size: 670*400MM
 Gift box size:755*485*140MM
 Master box size:770*505*310MM(2PCS/CTN)

Loading QTY:
 464pcs/20'GP,962pcs/40'GP, 1128pcs/40'HQ

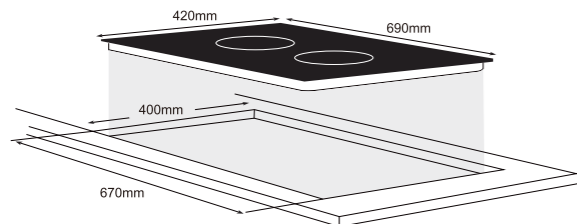


AM-DF301 Combine infrared and induction cooker

220-240V, 50/60Hz, 1200W+1800W+2200W

Special black crystal glass for infrared cooker
 High-grade metal body
 Sensor touch control,4 digital display
 Half bridge technology
 Imported IGBT,stable performance
 Aluminum or copper coil for option,high thermal efficiency
 90V-270V,large range voltage adaptability
 Overheating and Overvoltage protection
 180 minutes timer function

Glass size:580*500MM
 Cut-Out Size: 550*470MM
 Gift box size:640*575*135MM
 Master box size:660*595*290MM(2PCS/CTN)

Loading QTY:
 508pcs/20'GP,1054pcs/40'GP, 1234pcs/40'HQ

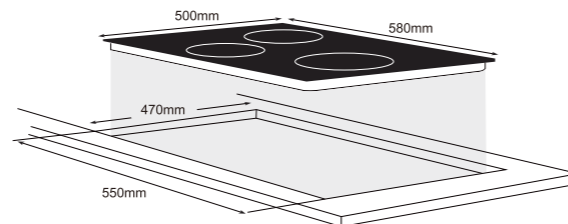

Combine infrared and induction cooker




Glass size:860*450MM
 Cut-Out Size: 830*420MM
 Master box size:920*510*150MM(2PCS/CTN)

AM-DF302 Combine infrared and induction cooker

220-240V, 50/60Hz, 2500W+1200W+2200W

Special black crystal glass for infrared cooker
 High-grade metal body
 Sensor touch control,4 digital display
 Half bridge technology
 Imported IGBT,stable performance
 Aluminum or copper coil for option,high thermal efficiency
 90V-270V,large range voltage adaptability
 Overheating and Overvoltage protection
 180 minutes timer function

Loading QTY:
 794pcs/20'GP,1648pcs/40'GP, 1932pcs/40'HQ

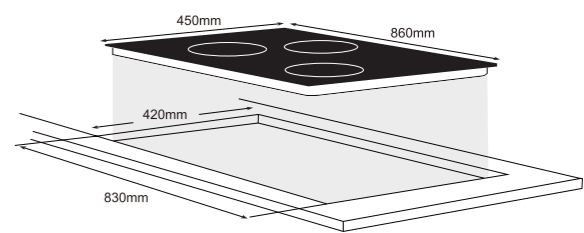


AM-DF401 Combine infrared and induction cooker

220-240V, 50/60Hz, 2000W+1500W+2000W+1200W

Special black crystal glass for infrared cooker
 High-grade metal body
 Sensor touch control,4 digital display
 Over heating and Over voltage protection
 180 minutes timer function

Glass size:590*520MM
 Cut-Out Size: 570*480MM
 Gift box size:640*560*139MM
 Master box size:660*570*295MM(2PCS/CTN)

Loading QTY:
 504pcs/20'GP,1044pcs/40'GP,1224pcs/40'HQ

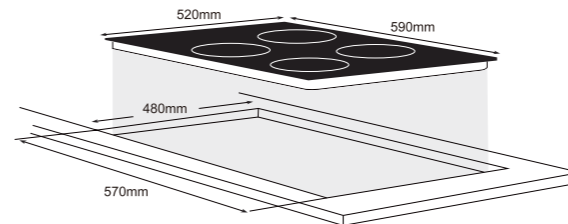


AM-DF402 Combine infrared and induction cooker

220-240V, 50/60Hz, 1800W+1600W+1800W+1300W

Special black crystal glass for infrared cooker
 High-grade metal body
 Sensor touch control,4 digital display
 Over heating and Over voltage protection
 180 minutes timer function

Glass size:590*520MM
 Cut-Out Size: 570*480MM
 Gift box size:640*560*139MM
 Master box size:660*570*295MM(2PCS/CTN)

Loading QTY:
 504pcs/20'GP,1044pcs/40'GP,1224pcs/40'HQ

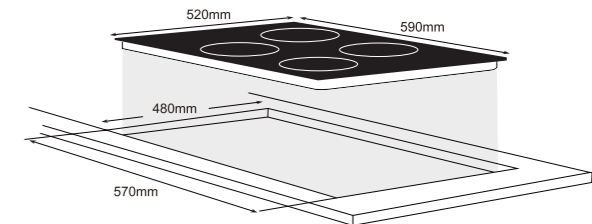



COMMERCIAL INDUCTION COOKER



Half-bridge technology
High efficiency, Stable and durable



COMMERCIAL INDUCTION COOKER



AM-CD401

220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Knob control with 4 digital LED display
- 220-240V 50/60Hz
- Left:3500+1500W output power
- Right:3500+1500W output power
- Overheating and Over voltage protection
- Product size: 695*600*125mm

Package
Without pot: 1pc/carton, carton size:770*680*210mm

Loading QTY:
Without pot: 560pcs/20' GP, 1320pcs/40'HQ

AM-CD201

220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Knob control with 4 digital LED display
- 220-240V 50/60Hz
- 3500+3500W output power
- Overheating and Over voltage protection
- Product size: 770*410*120mm

Package
Without pot: 1pc/carton, carton size:820*470*180mm

Loading QTY:
Without pot: 560pcs/20' GP, 1320pcs/40'HQ



AM-CDT401

220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Knob control with 4 digital LED display
- 220-240V 50/60Hz
- Left:3500+1500W output power
- Right:3500+1500W output power
- Overheating and Overvoltage protection
- Product size: 600x600x270mm

Package
Without pot: 1pc/carton, carton size:630*630*300

Loading QTY:
Without pot: 280pcs/20' GP, 680pcs/40'HQ

Half-bridge technology
High efficiency, Stable and durable



5000w
High-power



AM-CD206

- Commercial Induction cooker
- Stainless steel body
- Micro black crystal glass
- Sensor touch control
- 4 digital LED display
- Copper heating coil
- Overheating protection function
- Power and Frequency : 220-240V , 50/60HZ , 5000W+5000W
- Size: 800*500*185mm



AM-CD205

- Commercial Induction cooker
- Stainless steel body
- Micro black crystal glass
- Sensor touch control
- 4 digital LED display
- Copper heating coil
- Overheating protection function
- Power and Frequency : 220-240V
50/60HZ , 3500W+3500W
- Size: 680*430*120mm

Half-bridge technology
High efficiency, Stable and durable

5000w
High-power



COMMERCIAL INDUCTION COOKER



AM-CD207

- Commercial Induction cooker
- Stainless steel body
- Micro black crystal glass+wok
- Sensor touch control
- 4 digital LED display
- Copper heating coil
- Overheating protection function
- Power and Frequency : 220-240V , 50/60HZ
5000W+5000W
- Size: 800*500*185mm



AM-CD208

- Commercial Induction cooker
- Stainless steel body
- Micro black crystal glass
- Sensor touch control
- 4 digital LED display
- Copper heating coil
- Overheating protection function
- Power and Frequency : 220-240V
50/60HZ , 3500W+3500W
- Size: 680*430*120mm



Half-bridge technology High efficiency, Stable and durable



AM-CDT101

380V-400V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Knob control with 4 digital LED display
- 380-400V 50/60Hz
- 500-5000W output power
- Overheating and Overvoltage protection
- Product size: 600x325x385mm

Package

Without pot: pc/carton, carton size:430*630*300

Loading QTY:

Without pot: 350pcs/20' GP, 850pcs/40'HQ



Max Power
8000W

AM-CDT101W

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Knob control with 4 digital LED display
- 220-240V 50/60Hz
- 500-3500W output power
- Overheating and Overvoltage protection
- Product size: 400x600x270mm

Package

Without pot: pc/carton, carton size:430*630*300

Loading QTY:

Without pot: 350pcs/20' GP, 850pcs/40'HQ



AM-CDT102

380V-400V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Knob control with 4 digital LED display
- 380-400V 50/60Hz
- 500-5000W output power
- Overheating and Overvoltage protection
- Product size: 500x500x380mm

Package

Without pot: pc/carton, carton size:430*630*300

Loading QTY:

Without pot: 350pcs/20' GP, 850pcs/40'HQ



AM-CD801

380V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Magnetic switch control with 4 digital LED display
- 380V 50/60Hz
- 500-8000W output power
- 180 minutes timer function
- Overheating and Over voltage protection
- Product size: 550*530*225mm

Package

Without pot: 1pc/carton, carton size:660*540*300mm

Loading QTY:

Without pot: 400pcs/20' GP, 1000pcs/40'HQ



AM-CD801W

380V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Magnetic switch control with 4 digital LED display
- 380V 50/60Hz
- 500-8000W output power
- 180 minutes timer function
- Overheating and Over voltage protection
- Product size: 550*530*235mm

Package

Without pot: 1pc/carton, carton size:580X560X255mm

Loading QTY:

Without pot: 400pcs/20' GP, 1000pcs/40'HQ



Half-bridge technology
High efficiency, Stable and durable



COMMERCIAL INDUCTION COOKER



COMMERCIAL INDUCTION COOKER

AM-503W

220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Sensor touch control 4 digital LED display
- 220-240V 50/60Hz, or 120V, 60Hz
- 500-5000W output power
- 180 minutes timer function
- 60°C-240°C temperature setting
- Overheating and Overvoltage protection
- Product size: 500*400*185mm

Package

Without pot: 1pc/carton, carton size:465*270*575mm

Loading QTY:

Without pot: 750pcs/20' GP, 1800pcs/40'HQ



AM-CD506W

220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Sensor touch control with 4 digital LED display
- 220-240V 50/60Hz, or 120V, 60Hz
- 500-5000W output power
- 180 minutes timer function
- 60°C-240°C temperature setting
- Overheating and Overvoltage protection
- Product size: 500*400*185mm

Package

Without pot: 1pc/carton, carton size:465*270*575mm

Loading QTY:

Without pot: 750pcs/20' GP, 1800pcs/40'HQ



AM-CD506

220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Sensor touch control with 4 digital LED display
- 220-240V 50/60Hz, or 120V, 60Hz
- 500-3500W output power
- 180 minutes timer function
- 60°C-240°C temperature setting
- Overheating and Overvoltage protection
- Product size: 500*400*185mm

Package

Without pot: 1pc/carton, carton size:465*270*575mm

Loading QTY:

Without pot: 750pcs/20' GP, 1800pcs/40'HQ

Half-bridge technology High efficiency, Stable and durable

AM-CD504W

220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Sensor touch control with knob 4 digital LED display
- 220-240V 50/60Hz, or 120V, 60Hz
- 500-5000W output power
- 180 minutes timer function
- 60°C-240°C temperature setting
- Overheating and Overvoltage protection
- Product size: 500*400*185mm

Package

Without pot: 1pc/carton, carton size:465*270*575mm

Loading QTY:

Without pot: 750pcs/20' GP, 1800pcs/40'HQ



AM-CD101

220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Sensor touch control 4 digital LED display
- 220-240V 50/60Hz, or 120V, 60Hz
- 500-3500W output power
- 180 minutes timer function
- 60°C-240°C temperature setting
- Overheating and Overvoltage protection
- Product size: 330 x 415 x 100 mm

Package

Without pot: 1pc/carton, carton size:500*400*140

Loading QTY:

Without pot: 920pcs/20' GP, 2200pcs/40'HQ



AM-CD505

220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Button control with knob 4 digital LED display
- 220-240V 50/60Hz, or 120V, 60Hz
- 500-5000W output power
- 180 minutes timer function
- 60°C-240°C temperature setting
- Overheating and Overvoltage protection
- Product size: 500*400*185mm

Package

Without pot: 1pc/carton, carton size:465*270*575mm

Loading QTY:

Without pot: 750pcs/20' GP, 1800pcs/40'HQ



AM-CD102

220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Sensor touch control 4 digital LED display
- 220-240V 50/60Hz, or 120V, 60Hz
- 500-3500W output power
- 180 minutes timer function
- 60°C-240°C temperature setting
- Overheating and Overvoltage protection
- Product size: 340 x 445 x 117 mm

Package

Without pot: 1pc/carton, carton size:500*400*140

Loading QTY:

Without pot: 920pcs/20' GP, 2200pcs/40'HQ

AM-CD507

220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Sensor touch control 4 digital LED display
- 220-240V 50/60Hz, or 120V, 60Hz
- 500-5000W output power
- 180 minutes timer function
- 60°C-240°C temperature setting
- Overheating and Overvoltage protection
- Product size: 500*400*185mm

Package

Without pot: 1pc/carton, carton size: 465*270*575mm

Loading QTY:

Without pot: 750pcs/20' GP, 1800pcs/40'HQ



AM-CD103

220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- knob control 4 digital LED display
- 220-240V 50/60Hz, or 120V, 60Hz
- 500-3500W output power
- 180 minutes timer function
- 60°C-240°C temperature setting
- Overheating and Overvoltage protection
- Product size: 340 x 445 x 117 mm

Package

Without pot: 1pc/carton, carton size:500*400*140

Loading QTY:

Without pot: 920pcs/20' GP, 2200pcs/40'HQ



COMMERCIAL INDUCTION COOKER NEW

GOOD STARTS HERE



Half-bridge technology
High efficiency, Stable and durable



AM-CD112

220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Sencor touch control with LCD display
- 220-240V 50/60Hz, or 120V, 60Hz
- 500-3500W output power
- 180 minutes timer function
- 60 C-240C temperature setting
- Overheating and Overvoltage protection
- Product size: 430*340*120mm

WIRELESS THERMO PROBE



AM-CD112S

220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Sencor touch with knob control with LCD display
- 220-240V 50/60Hz, or 120V, 60Hz
- 500-3500W output power
- 180 minutes timer function
- 60 C-240 C temperature setting
- Overheating and Overvoltage protection
- Product size: 430*340*120mm

Package
Without pot: 1pc/carton, carton size: 415*180*520mm

Loading QTY:
Without pot: 920pcs/20' GP, 2200pcs/40'HQ

Half-bridge technology
High efficiency, Stable and durable



AM-CD102W

220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Sensor touch control 4 digital LED display
- 220-240V 50/60Hz, or 120V, 60Hz
- 500-3500W output power
- 180 minutes timer function
- 60°C-240°C temperature setting
- Overheating and Overvoltage protection
- Product size: 430*340*120mm

Package

Without pot: 1pc/carton, carton size: 415*180*520mm

Loading QTY:

Without pot: 920pcs/20' GP, 2200pcs/40'HQ



AM-CD104

220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Button control with 4 digital LED display
- 220-240V 50/60Hz, or 120V, 60Hz
- 500-3500W output power
- 180 minutes timer function
- 60°C-240°C temperature setting
- Overheating and Overvoltage protection
- Product size: 430*340*120mm

Package

Without pot: 1pc/carton, carton size: 415*180*520mm

Loading QTY:

Without pot: 920pcs/20' GP, 2200pcs/40'HQ



AM-CD105

220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Sensor touch control with 4 digital LCD display
- 220-240V 50/60Hz, or 120V, 60Hz
- 500-3500W output power
- 180 minutes timer function
- 60°C-240°C temperature setting
- Overheating and Overvoltage protection
- Product size: 430*340*120mm

Package

Without pot: 1pc/carton, carton size: 415*180*520mm

Loading QTY:

Without pot: 920pcs/20' GP, 2200pcs/40'HQ

COMMERCIAL INDUCTION COOKER



COMMERCIAL INDUCTION COOKER



AM-CD108

220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Sensor touch control with 4 digital LED display
- 220-240V 50/60Hz, or 120V, 60Hz
- 500-3500W output power
- 180 minutes timer function
- 60°C-240°C temperature setting
- Overheating and Overvoltage protection
- Product size: 430*340*120mm

Package

Without pot: 1pc/carton, carton size: 415*180*520mm

Loading QTY:

Without pot: 920pcs/20' GP, 2200pcs/40'HQ



AM-CD108T

220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Sensor touch control with 4 digital LED display
- 220-240V 50/60Hz, or 120V, 60Hz
- 500-3500W output power
- 180 minutes timer function
- 60°C-240°C temperature setting
- Overheating and Overvoltage protection
- Product size: 430*340*120mm

Package

Without pot: 1pc/carton, carton size: 415*180*520mm

Loading QTY:

Without pot: 920pcs/20' GP, 2200pcs/40'HQ



AM-CD108W

220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Sensor touch control with 4 digital LED display
- 220-240V 50/60Hz, or 120V, 60Hz
- 500-3500W output power
- 180 minutes timer function
- 60°C-240°C temperature setting
- Overheating and Overvoltage protection
- Product size: 430*340*120mm

Package

Without pot: 1pc/carton, carton size: 415*180*520mm

Loading QTY:

Without pot: 920pcs/20' GP, 2200pcs/40'HQ

Half-bridge technology
High efficiency
Stable and durable



COMMERCIAL INDUCTION COOKER



AM-CD117
220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Button control with 4 digital LED display
- 220-240V 50/60Hz, or 120V, 60Hz
- 500-3500W output power
- 180 minutes timer function
- 60°C-240°C temperature setting
- Overheating and Overvoltage protection
- Product size: 430*355*100mm

Package
Without pot: 1pc/carton, carton size: 415*180*520mm

Loading QTY:
Without pot: 920pcs/20' GP, 2200pcs/40'HQ

AM-CD119
220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Sencor touch control with LCD display
- 220-240V 50/60Hz, or 120V, 60Hz
- 500-3500W output power
- 180 minutes timer function
- 60°C-240°C temperature setting
- Overheating and Overvoltage protection
- Product size 430*340*120mm

Package
Without pot: 1pc/carton, carton size: 415*180*520mm

Loading QTY:
Without pot: 920pcs/20' GP, 2200pcs/40'HQ



AM-CD27A
220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Button control with 4 digital LED display
- 220-240V 50/60Hz, or 120V, 60Hz
- 500-3500W output power
- 180 minutes timer function
- 60°C-240°C temperature setting
- Overheating and Overvoltage protection
- Product size: 390*315*90mm

Package
Without pot: 1pc/carton, carton size: 415*180*520mm

Loading QTY:
Without pot: 920pcs/20' GP, 2200pcs/40'HQ



AM-CD111

220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Sencor touch control with 4 digital LED display
- 220-240V 50/60Hz, or 120V, 60Hz
- 500-3500W output power
- 180 minutes timer function
- 60°C-240°C temperature setting
- Overheating and Overvoltage protection
- Product size 430*340*120mm

Package

Without pot: 1pc/carton, carton size: 415*180*520mm

Loading QTY:

Without pot: 920pcs/20' GP, 2200pcs/40'HQ



AM-CD113

220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Sencor touch control with 4 digital LED display
- 220-240V 50/60Hz, or 120V, 60Hz
- 500-3500W output power
- 180 minutes timer function
- 60°C-240°C temperature setting
- Overheating and Overvoltage protection
- Product size: 430*340*120mm

Package

Without pot: 1pc/carton, carton size: 415*180*520mm

Loading QTY:

Without pot: 920pcs/20' GP, 2200pcs/40'HQ

AM-CD113W

220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- Sencor touch control with 4 digital LED display
- 220-240V 50/60Hz, or 120V, 60Hz
- 500-3500W output power
- 180 minutes timer function
- 60°C-240°C temperature setting
- Overheating and Overvoltage protection
- Product size: 430*340*120mm

Package

Without pot: 1pc/carton, carton size: 415*180*520mm

Loading QTY:

Without pot: 920pcs/20' GP, 2200pcs/40'HQ



Half-bridge technology
High efficiency, Stable and durable

3500W

High-power



AM-BCD101W

220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- separated control box with 4 digital LED display
- 220-240V 50/60Hz, or 120V, 60Hz
- 500-3500W output power
- 180 minutes timer function
- Overheating and Overvoltage protection
- Product size: 360x340x140mm

Package

Without pot: 1pc/carton, carton size:390*410*200

Loading QTY:

Without pot: 750pcs/20' GP, 1800pcs/40'HQ



AM-BCD102W

220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- separated control box with 4 digital LED display
- 220-240V 50/60Hz, or 120V, 60Hz
- 500-3500W output power
- 180 minutes timer function
- Overheating and Overvoltage protection
- Product size: 360x340x140mm

Package

Without pot: 1pc/carton, carton size:390*410*200

Loading QTY:

Without pot: 750pcs/20' GP, 1800pcs/40'HQ



AM-BCD101

220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- separated control box with 4 digital LED display
- 220-240V 50/60Hz, or 120V, 60Hz
- 500-3500W output power
- 180 minutes timer function
- Overheating and Overvoltage protection
- Product size: 360x340x120mm

Package

Without pot: 1pc/carton, carton size:390*410*200

Loading QTY:

Without pot: 750pcs/20' GP, 1800pcs/40'HQ



AM-BCD102

220V~240V 50Hz/60Hz

- Commercial induction cooker
- Black Micro crystal glass
- Stainless steel body
- separated control box with 4 digital LED display
- 220-240V 50/60Hz, or 120V, 60Hz
- 500-3500W output power
- 180 minutes timer function
- Overheating and Overvoltage protection
- Product size: 360x340x120mm

Package

Without pot: 1pc/carton, carton size:390*410*200

Loading QTY:

Without pot: 750pcs/20' GP, 1800pcs/40'HQ

Half-bridge technology
High efficiency
Stable and durable



AM-CD602C

- Commercial Induction cooker
- Stainless steel body
- Micro black crystal glass
- Knob with sensor touch control
- 4 digital LED display
- Copper heating coil
- Overheating protection function
- Power and Frequency : 220-240V/380-400V, 50/60HZ , 4*3500W/4*5000W
- Size:1200*900*800mm



AM-TCD401

- Commercial Induction cooker
- Stainless steel body
- Micro black crystal glass
- Knob with button Control
- 4 digital LED display
- Copper heating coil
- Overheating protection function
- Power and Frequency :220-240V/380-400V, 50/60HZ, 4*3500W/4*5000W
- Size: 800*900*800



AM-TCD601

- Commercial Induction cooker
- Stainless steel body
- Micro black crystal glass
- Knob with button Control
- 4 digital LED display
- Copper heating coil
- Overheating protection function
- Power and Frequency :220-240V/380-400V, 50/60HZ, 4*3500W/4*5000W
- Size: 1200*900*800



AM-TCD402

- Commercial Induction cooker
- Stainless steel body
- Micro black crystal glass
- Knob with sensor touch control
- 4 digital LED display
- Copper heating coil
- Overheating protection function
- Power and Frequency : 220-240V/380-400V, 50/60HZ , 4*3500W/4*5000W
- Size: 800*900*800mm



AM-TCD402C

- Commercial Induction cooker
- Stainless steel body
- Micro black crystal glass
- Knob with sensor touch control
- 4 digital LED display
- Copper heating coil
- Overheating protection function
- Power and Frequency : 220-240V/380-400V, 50/60HZ , 4*3500W/4*5000W
- Size: 800*900*800mm



AM-CD1500

- Commercial Induction cooker
- Stainless steel body
- Micro black crystal glass
- Button Control
- 4 digital LED display
- Copper heating coil
- Overheating protection function
- Power and Frequency:380V, 50/60HZ, 15KW
- Size: 730*650*1200



AM-CD1500W

- Commercial Induction cooker
- Stainless steel body
- Micro black crystal glass
- Button Control
- 4 digital LED display
- Copper heating coil
- Overheating protection function
- Power and Frequency: 380V, 50/60HZ, 15KW
- Size: 730*650*1200

Half-bridge technology
High efficiency
Stable and durable



INDUCTION
DEEP FRYER



AM-CD12F101

- Induction Deep Fryer
- Stainless steel body
- Sensor touch control with 4 digital display
- 220-240V, 3500W,
- 60°C-200°C temperature setting
- Overheating and over voltage protection
- Capacity: 12L
- product size: 330*505*395mm (315+80)



AM-CD22F201

- Induction Deep Fryer
- Stainless steel body
- Sensor touch control with 4 digital display
- 220-240V, 3500W,
- 60°C-200°C temperature setting
- Overheating and over voltage protection
- Capacity: 22L
- product size: 400*600*550mm (400+150)



AM-CD22F201C

- Induction Deep Fryer
- Stainless steel body
- Sensor touch control with 4 digital display
- 220-240V, 3500W,
- 60°C-200°C temperature setting
- Overheating and over voltage protection
- Capacity: 22L
- product size: 600*600*950mm (800+150)

Half-bridge technology
High efficiency
Stable and durable



INDUCTION
WARMER

GOOD STARTS HERE

AM-BCD105

- Commercial Induction warmer
- Black Micro Crystal glass
- Stainless steel body and plastic bottom body
- Stainless steel frame
- Knob control with 3 digital LED display
- 220-240V, 50/60 Hz, 1000W
- 45°C to 100°C Warming temperature
- Overheating and overvoltage protection
- Product size: 530*345*65mm

Package
Without pot: pc/carton, carton size: 610*140*475mm

Loading QTY:
Without pot: 580pcs/20' GP, 1400pcs/40'HQ



AM-BCD106

- Commercial Induction warmer
- Black Micro Crystal glass
- Stainless steel body and plastic bottom body
- Aluminum frame
- Knob control with 3 digital LED display
- 220-240V, 50/60 Hz, 1000W
- 45°C to 100°C Warming temperature
- Overheating and over voltage protection
- Product size: 505*358*75mm

Package
Without pot: pc/carton, carton size: 610*140*475mm

Loading QTY:
Without pot: 580pcs/20' GP, 1400pcs/40'HQ



AM-BCD107

- Commercial Induction warmer
- Black Micro Crystal glass
- Stainless steel body and plastic bottom body
- Aluminum frame
- Knob control with 3 digital LED display
- 220-240V, 50/60 Hz, 1000W
- 45°C to 100°C Warming temperature
- Overheating and over voltage protection
- Product size: 505*358*75mm

Package
Without pot: pc/carton, carton size: 610*140*475mm

Loading QTY:
Without pot: 580pcs/20' GP, 1400pcs/40'HQ

